



## Session

Previous

### Emerging trends and technologies

The session shall focus on:

- The changes witnessed in the process of generating, managing, providing and analysing geospatial information due to technology advancements
- The innovative, new applications on the geospatial horizon due to the increasing ubiquity of geospatial data that are contributing to its pervasiveness in everyday decision making

### Speakers



**Chairperson: Dr R. Nagaraja**  
Group Director  
National Remote Sensing Centre

[Presentation](#)



**Mena Paghadar | Manager**  
**Jignesh Shah | Senior Manager**  
Sectoral Analysis & Studies Group  
National Dairy Development Board

[Presentation](#)



**A. Mohan Rao**  
Senior Scientist  
TES Division

[Presentation](#)



**P Shasidhar Reddy**  
Manager Computer Systems  
National Remote Sensing Centre

[Presentation](#)



**Dr Philip Collier**  
Research Director  
Cooperative Research Centre for Spatial Information-Australia

[Presentation](#)



**Ramakrishna C**  
AGM - Technical Services  
Avineon

[Presentation](#)



**Sourabh S Sakhare**  
Asst. Manager - Marketing, Data Transformation & Analytics  
Infotech Enterprises Limited

[Presentation](#)



**Dr Zaffar Sadiq Mohamed-Ghouse**  
Principal Scientist -Spatial & IT  
GHD Australia

[Presentation](#)

# **Stratified One-stage Cluster Sampling using GIS for Surveys**

Mena Paghadar  
Manager  
NDDB, Anand  
*menap@nddb.coop*

Dr. Jignesh Shah  
Sr. Manager  
NDDB, Anand  
*jgshah@nddb.coop*

# Rural Sample Surveys

- ❑ Rural sample surveys are important in dairy sector, which provide essential inputs for various business/ operational planning
- ❑ Conventionally, multi-stage stratified random sampling methodology is used for the conduct of such surveys
- ❑ However, this methodology does not take into account the nature and shape of the geography and therefore, proper spread of the sample cannot be ensured

# Sampling methodology followed using GIS


- In first stage, the tehsil is divided into quadrant on the basis of area sampling
- In second stage, the villages in a quadrant are divided into two categories based on the village size (i.e., households in a village)
  - Villages having village size above average
  - Villages having village size below average
- 2 villages are selected at random from each of the two categories formed as above and all the households in sample villages will be surveyed

***Therefore, 16 villages from each tehsil are selected for the survey***




# Process Flow

# Size, shape and distribution of villages in tehsil

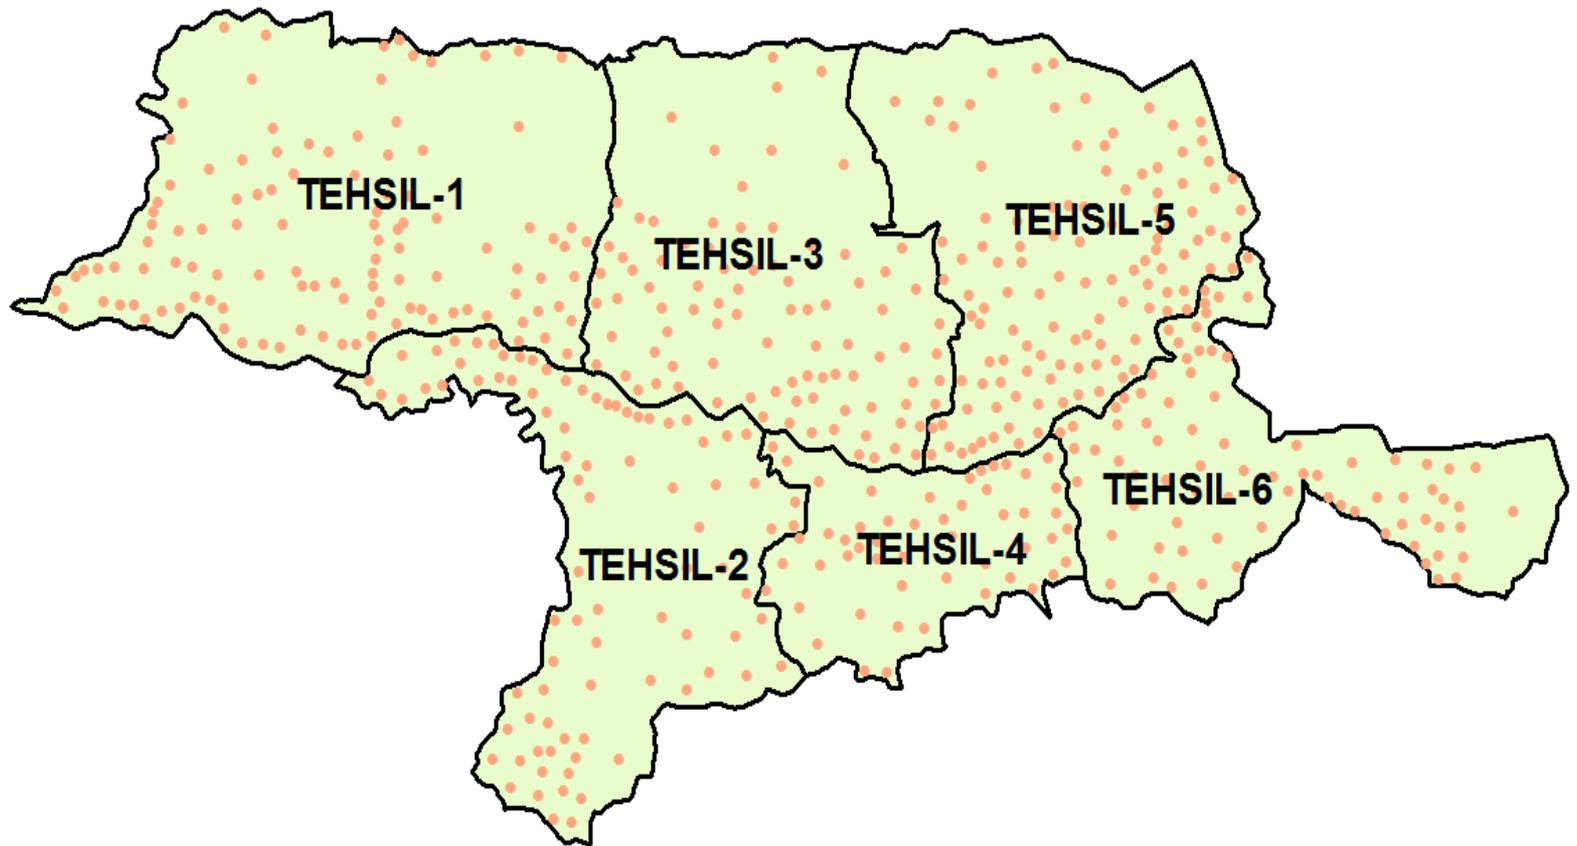


# Step 1 : Preparation of standard deviational ellipse

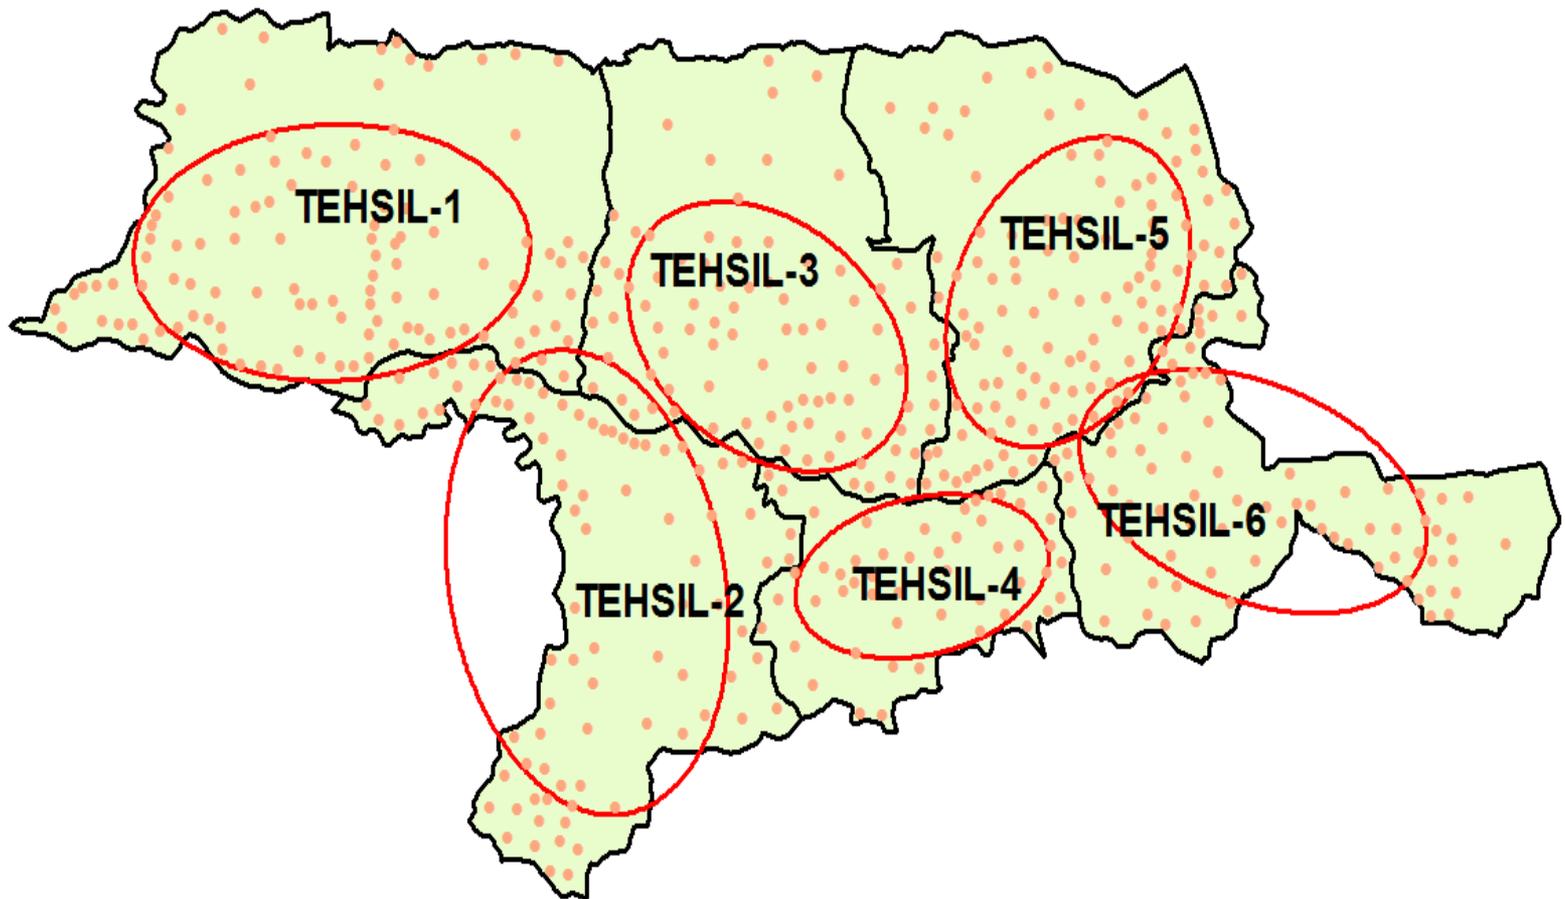

# Methodology for developing “Standard Deviational Ellipse”

## Use of ESRI’s Spatial Statistics tool

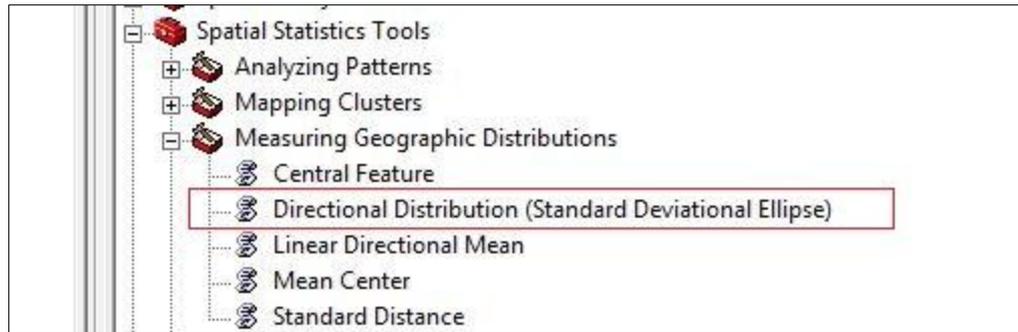

## Input parameters for directional distribution


Parameter	Explanation	Data type	Actual Input
<Input_Feature_Class >	A feature class containing a distribution of features for which the standard deviational ellipse will be calculated.	Feature Layer	Village locations (as points)
<Output_Ellipse_Feature_Class>	A polygon feature class that will contain the output ellipse feature.	Feature Class	
<I Standard Deviation   2 Standard Deviations   3 Standard Deviations >	The size of output ellipses in standard deviations. The default ellipse size is 1; valid choices are 1, 2, or 3 standard deviations.	String	1 Standard Deviation
{Weight_Field}	The numeric field used to weight locations according to their relative importance.	Field	Size of Households in a village
{Case_Field}	Field used to group features for separate directional distribution calculations. The case field can be of numeric, date, or string type.	Field	Tehsil of villages

# The output parameters of resultant directional ellipse

FID	Shape	TEHSIL	CenterX	CenterY	XStdDist	YStdDist	Rotation
5	Polygon	TEHSIL-1	531454.289	2348707.71	10201.0969	19171.8682	88.428766
8	Polygon	TEHSIL-2	556100.721	2322444.92	18825.9663	13213.0564	165.132701
14	Polygon	TEHSIL-3	573512.998	2342026.71	14322.8983	9580.03338	117.056591
2	Polygon	TEHSIL-4	588483.792	2322944.51	6298.6686	12347.8852	80.623216
13	Polygon	TEHSIL-5	602589.851	2345589.87	10096.0509	13786.5084	40.893259
10	Polygon	TEHSIL-6	620438.134	2329704.23	17277.3455	8780.53128	106.295433

- a) CenterX & CenterY : X & Y coordinates of center of ellipse;  $C(h,k)$
- b) XStdDist & YStdDist : Length of semi-major semi-/minor axis (i.e., length between the center and vertices of the ellipse);  $CA= C \leftrightarrow A$  and  $CB= C \leftrightarrow B$
- c) Rotation : Rotation angle of ellipse;  $\theta$

**Illustrative  
directional ellipse**

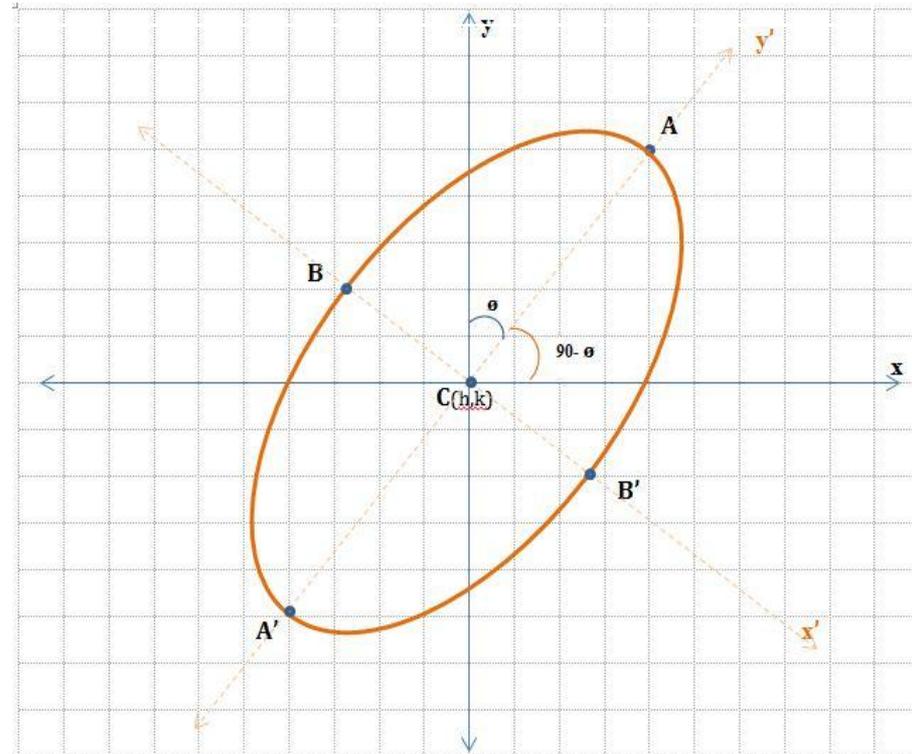

## Step 2 : Ascertaining Vertices & Co-vertices

The co-ordinates for vertices (A & A') and co-vertices (B & B') are calculated as -

If  $\theta < 90$  and  $Y > X$  i.e., Y is the major axis

$$Ax = h + CB \cos(90-\theta)$$

and

$$Ay = k + CB \sin(90-\theta)$$

$$A'x = h - CB \cos(90-\theta)$$

and

$$Ay = k - CB \sin(90-\theta)$$

$$Bx = h + CA \cos(180-\theta)$$

and

$$By = k + CA \sin(180-\theta)$$

$$B'x = h - CA \cos(180-\theta)$$

and

$$B'y = k - CA \sin(180-\theta)$$

If  $\theta > 90$  and  $X > Y$  i.e., X is the major axis

$$Ax = h + CA \cos(90-\theta)$$

and

$$Ay = k + CA \sin(90-\theta)$$

$$A'x = h - CA \cos(90-\theta)$$

and

$$Ay = k - CA \sin(90-\theta)$$

$$Bx = h + CB \cos(180-\theta)$$


and

$$By = k + CB \sin(180-\theta)$$


$$B'x = h - CB \cos(180-\theta)$$

and

$$B'y = k - CB \sin(180-\theta)$$

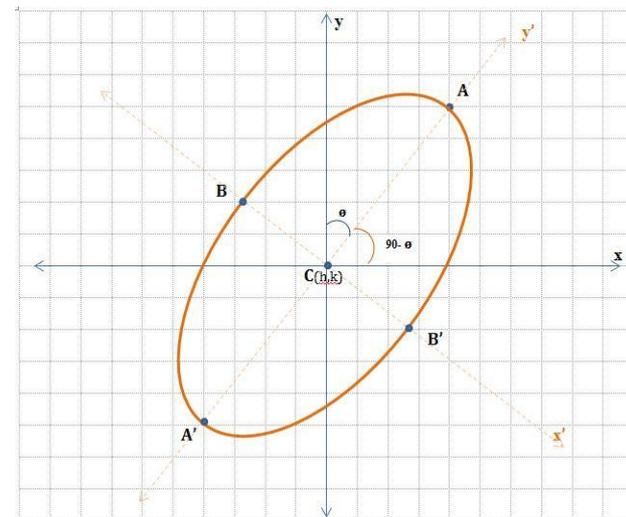


# Joining vertices & co-vertices of ellipse

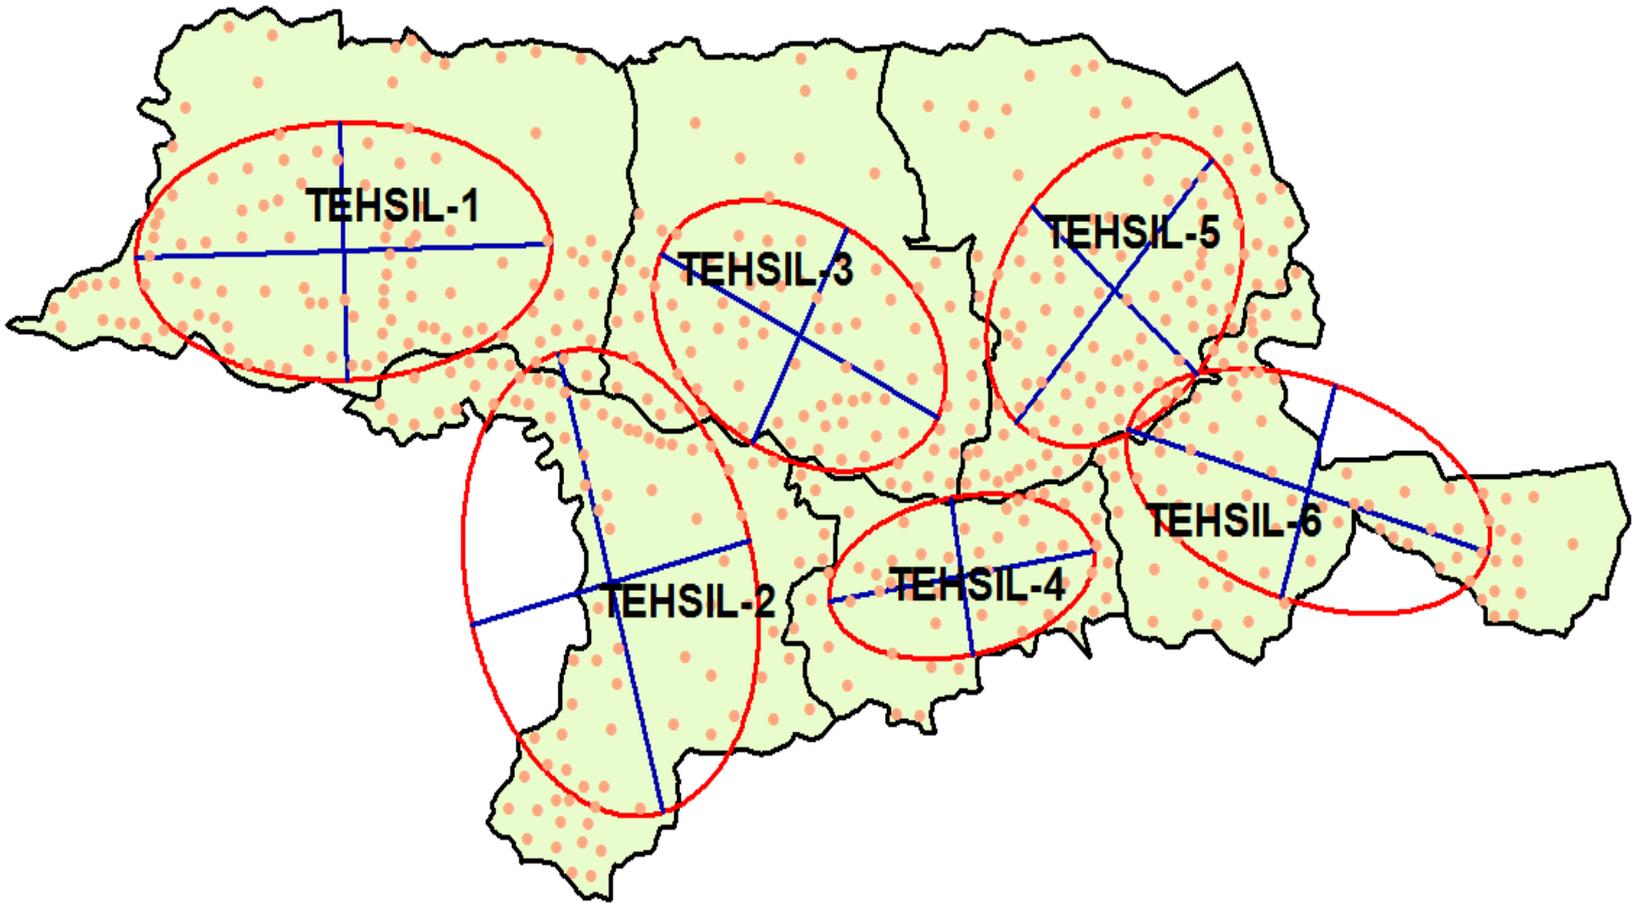


# Use of Hawth's tool

- The major and minor axes are drawn by joining the vertices (A & A') and co-vertices (B & B') using the functionality 'Add XY Line Data From Table' of **Hawth's Tool** provided under 'Table Tools'

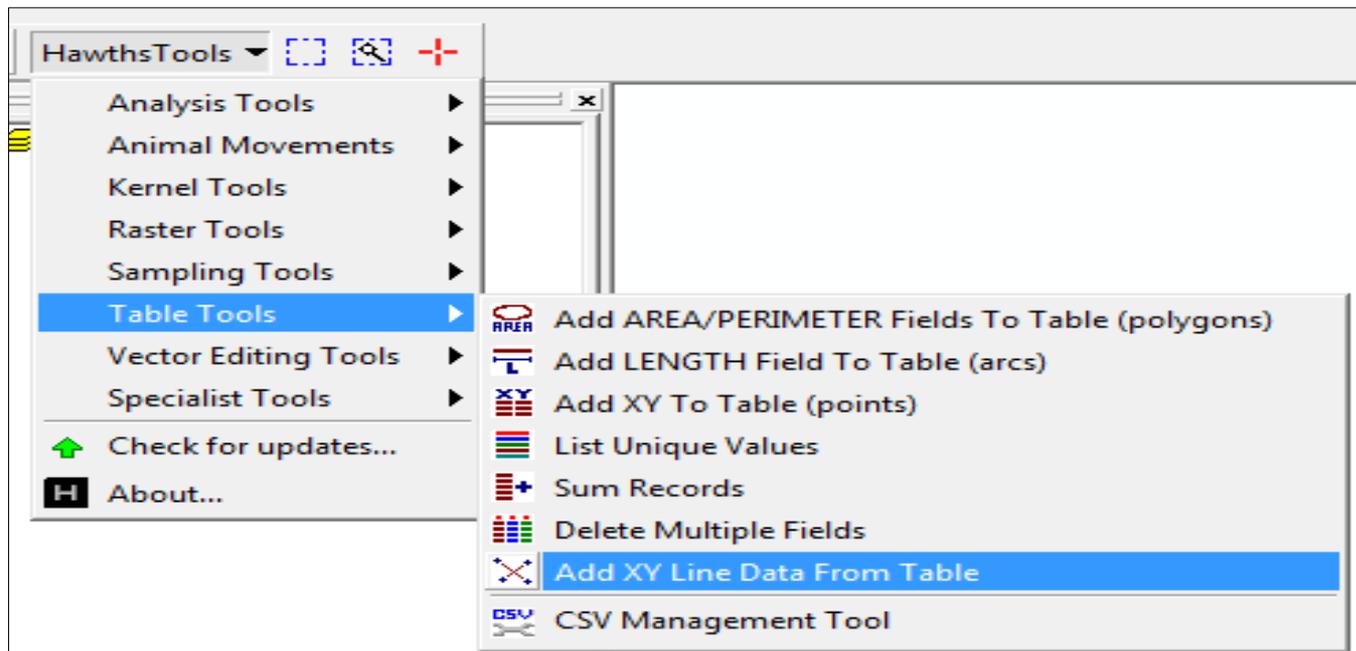


## Step 3 : Cutting the tehsil polygon by taking the major/minor axes of ellipse as reference

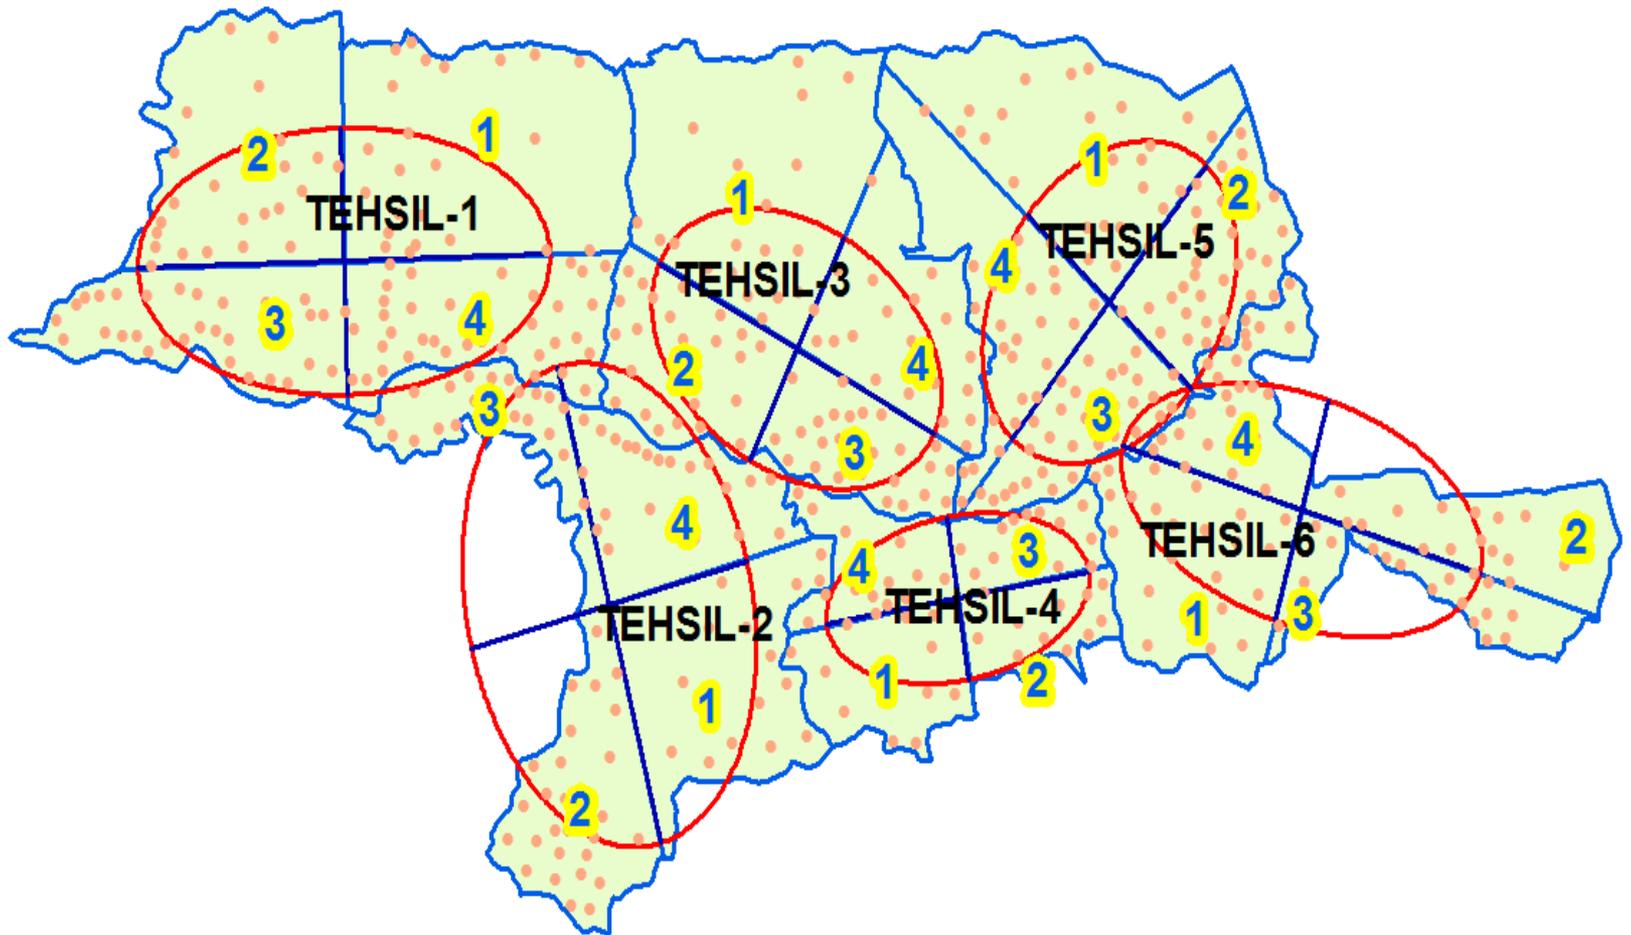


# Formation of quadrant


Taking these lines drawn as reference, each polygon was cut manually by using ESRI's "Cut Polygon features" task under the 'Modify Tasks' of Editor toolbar of ArcGIS desktop.

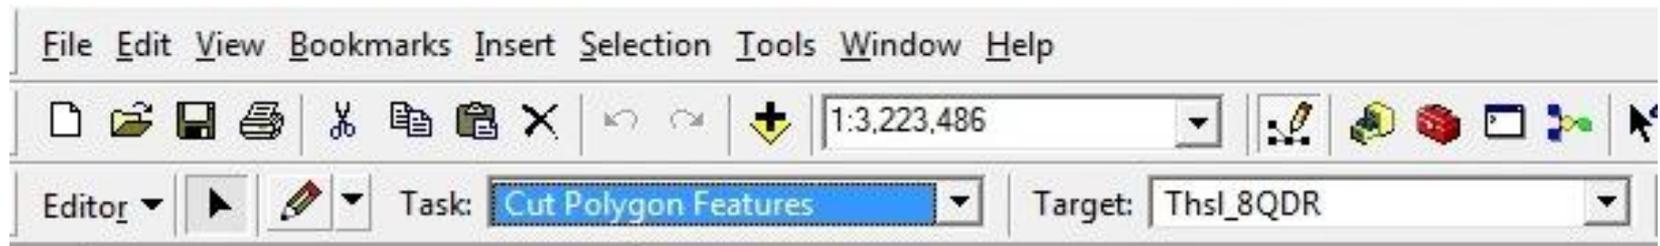

# Assigning villages to respective quadrant

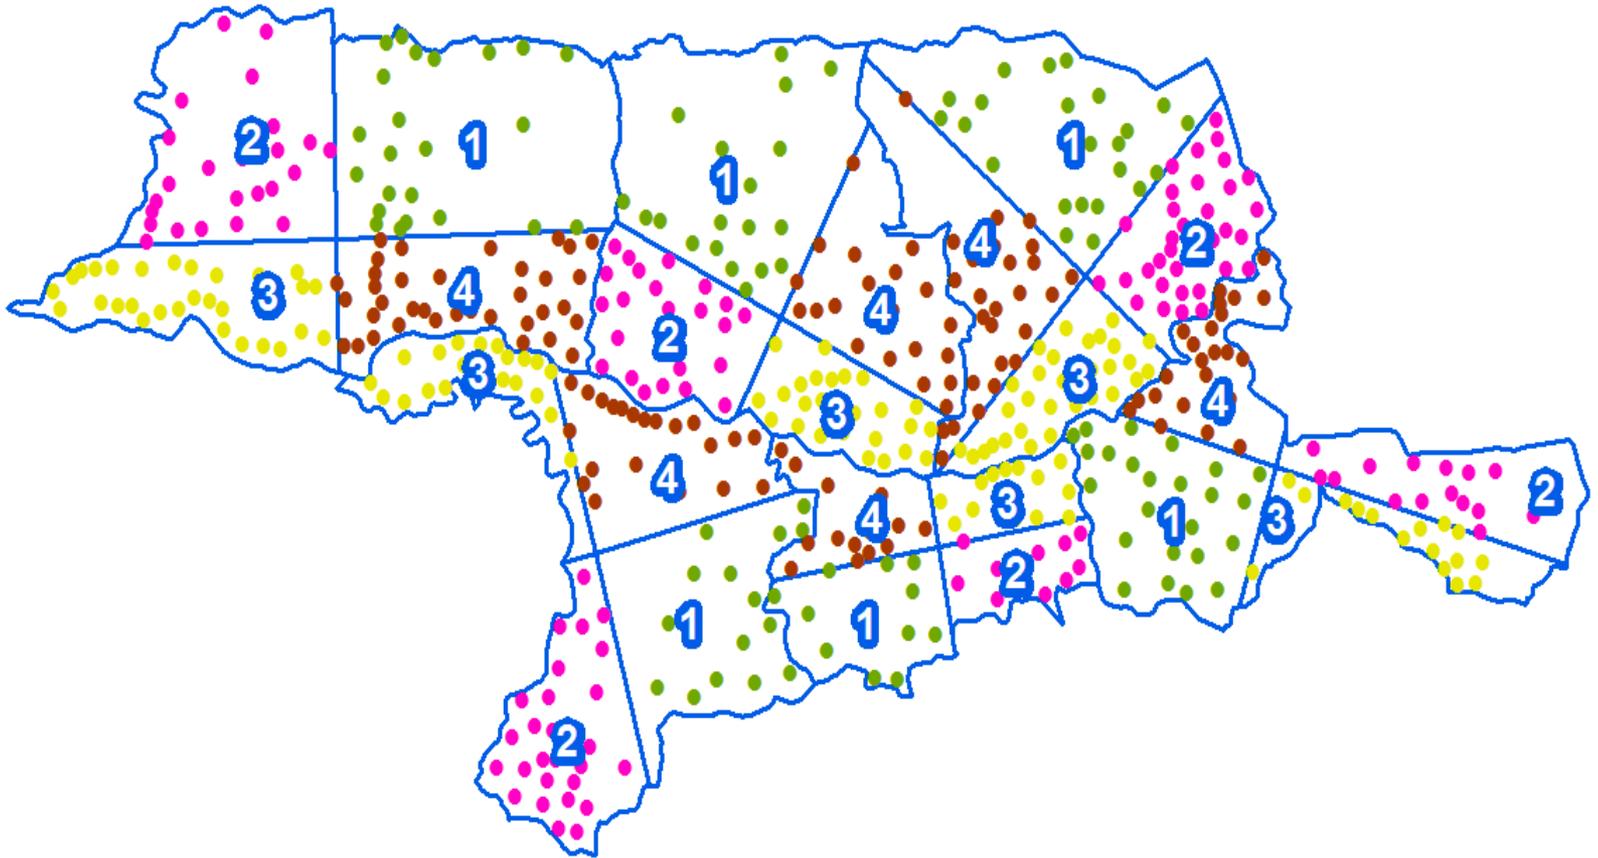

# Finally, the resultant outcome is ...

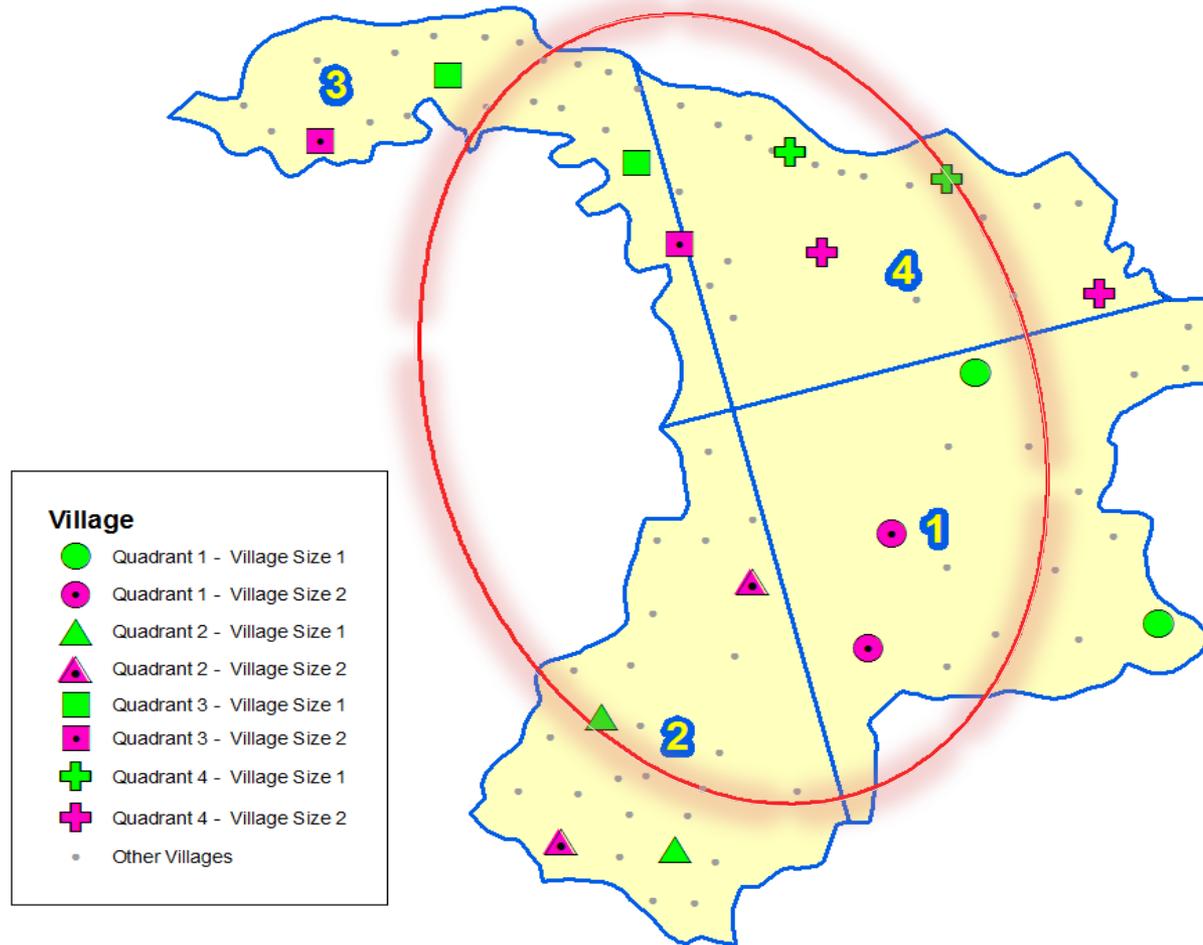

## Summing up ...

- The results of the sample survey undertaken following above sampling technique provides statistically robust estimates at the tehsil level
- The percentage standard error of the estimate is in the range of  $\pm 10-20$  percent



*Thank you*